

**DERWENT-ACC-NO:** 1989-266188

**DERWENT-WEEK:** 198937

*COPYRIGHT 2008 DERWENT INFORMATION LTD*

**TITLE:** Liquid fuel burner with ignition and fuel-air supply control has auxiliary igniting switch controlling electromagnetic valve on auxiliary pipe with flame strengthening switch on main pipe

**INVENTOR:** SHIN J H

**PATENT-ASSIGNEE:** TSAI T B[TSAIL]

**PRIORITY-DATA:** 1988GB-004000 (February 20, 1988)

**PATENT-FAMILY:**

PUB-NO	PUB-DATE	LANGUAGE
GB 2215032 A	September 13, 1989	EN

**APPLICATION-DATA:**

PUB-NO	APPL-DESCRIPTOR	APPL-NO	APPL-DATE
GB 2215032A	N/A	1988GB-004000	February 20, 1988

**INT-CL-CURRENT:**

TYPE	IPC DATE
CIPS	F23D11/38 20060101
CIPS	F23D11/42 20060101

CIPS

F23Q3/00 20060101

**ABSTRACTED-PUB-NO:** GB 2215032 A**BASIC-ABSTRACT:**

The burner has a main injector (56) which mixes fuel and air to produce a main flame (94) and an auxiliary injector (43) which produces an auxiliary flame (93). The auxiliary is positioned so that it can ignite the fuel/air mixture from the main injector. The auxiliary flame is itself ignited by sparking electrodes carried on a support (11). Manual controls (81 to 84) are used to regulate ignition and fuel/air supplies.

A switch seat has an indicating light with an igniting switch controlling ignition of the electrodes. An auxiliary flame igniting switch controlling an electro-magnetic valve on the auxiliary flame pipe and a flame strengthening switch for controlling the electro-magnetic valves on the main flame pipe and main flame air pipe.

**ADVANTAGE** - Fuel wastage is minimised.

**CHOSEN-DRAWING:** Dwg.2/6

**TITLE-TERMS:** LIQUID FUEL BURNER IGNITION AIR  
SUPPLY CONTROL AUXILIARY IGNITE  
SWITCH ELECTROMAGNET VALVE PIPE  
FLAME STRENGTH MAIN

**DERWENT-CLASS:** Q73 X27**EPI-CODES:** X27-G02;

# (12) UK Patent Application (19) GB (11) 2 215 032 A

(43) Date of A publication 13.09.1989

(21) Application No 8804000.1

(22) Date of filing 20.02.1988

(71) Applicants

Torng Bo Tsai  
Floor 2, No 367-1 Cheng Ching Road, Kaoslung City,  
Taiwan, Province of China

Jiin Her Shin  
Floor 5, No 146 Wu Chuan Road, Kaohsiun City,  
Taiwan, Province of China

(72) Inventor

Jiin Her Shin

(74) Agent and/or Address for Service

Eric Potter & Clarkson  
14 Oxford Street, Nottingham, NG1 5BP,  
United Kingdom

(51) INT CL<sup>a</sup>

F23Q 9/00, F23D 11/24

(52) UK CL (Edition J)

F4T THB TS2E TS2F TS2H2 TS2H4 TS6E1 TS6E3  
TS6E6

(56) Documents cited

None

(58) Field of search

UK CL (Edition J) F4T  
INT CL<sup>a</sup> F23D, F23Q

(54) Liquid fuel burner

(57) A liquid-fuel burner has a main injector 56 which mixes fuel and air to produce a main flame 94, an auxiliary injector 43 which produces an auxiliary flame 93, the auxiliary flame being positioned so that it can ignite the fuel/air mixture from the main injector. The auxiliary flame is itself ignited by sparking electrodes carried on a support 11. Manual controls 81 to 84 are used to regulate ignition and fuel/air supplies.

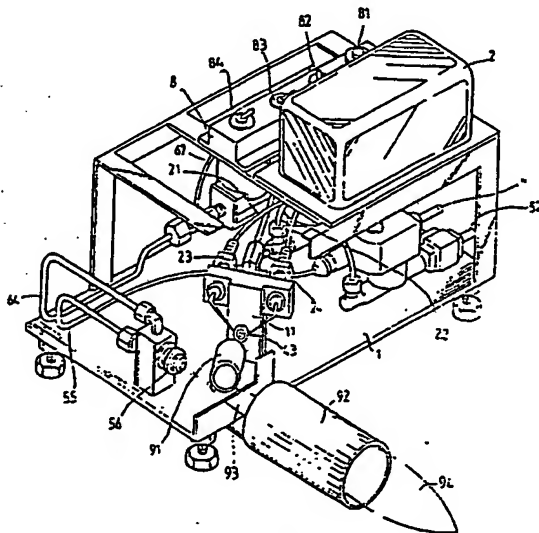
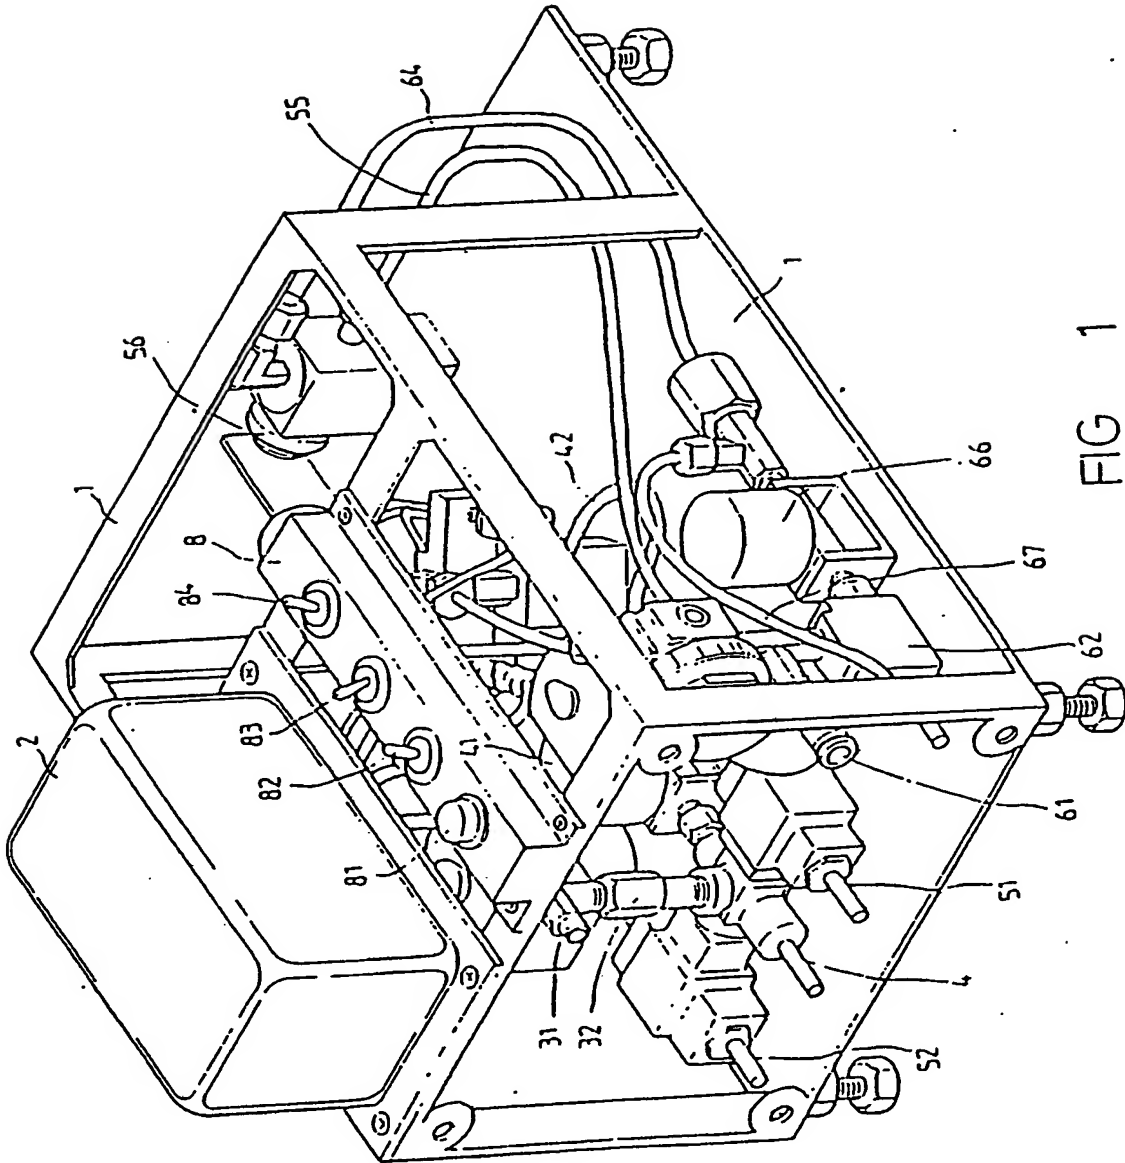


FIG. 2



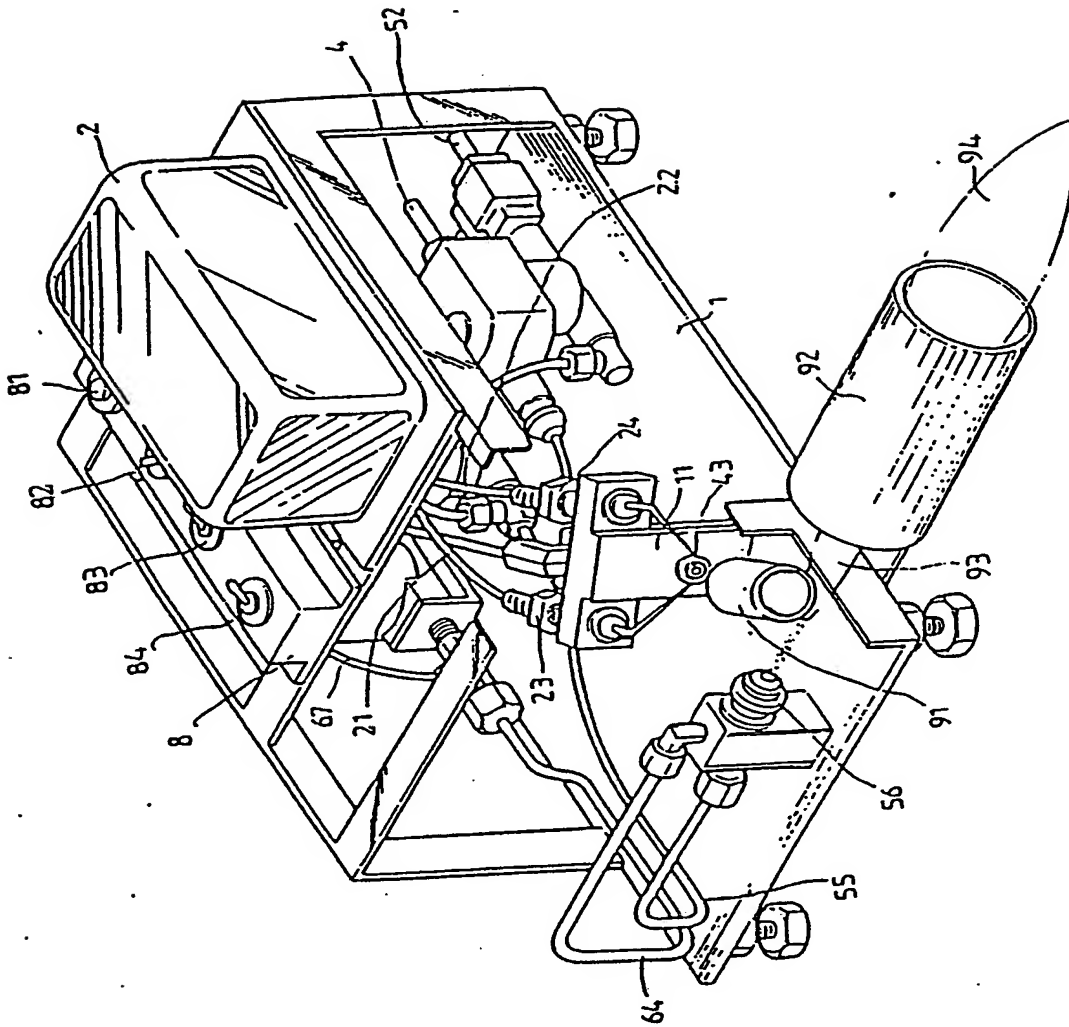


FIG. 2

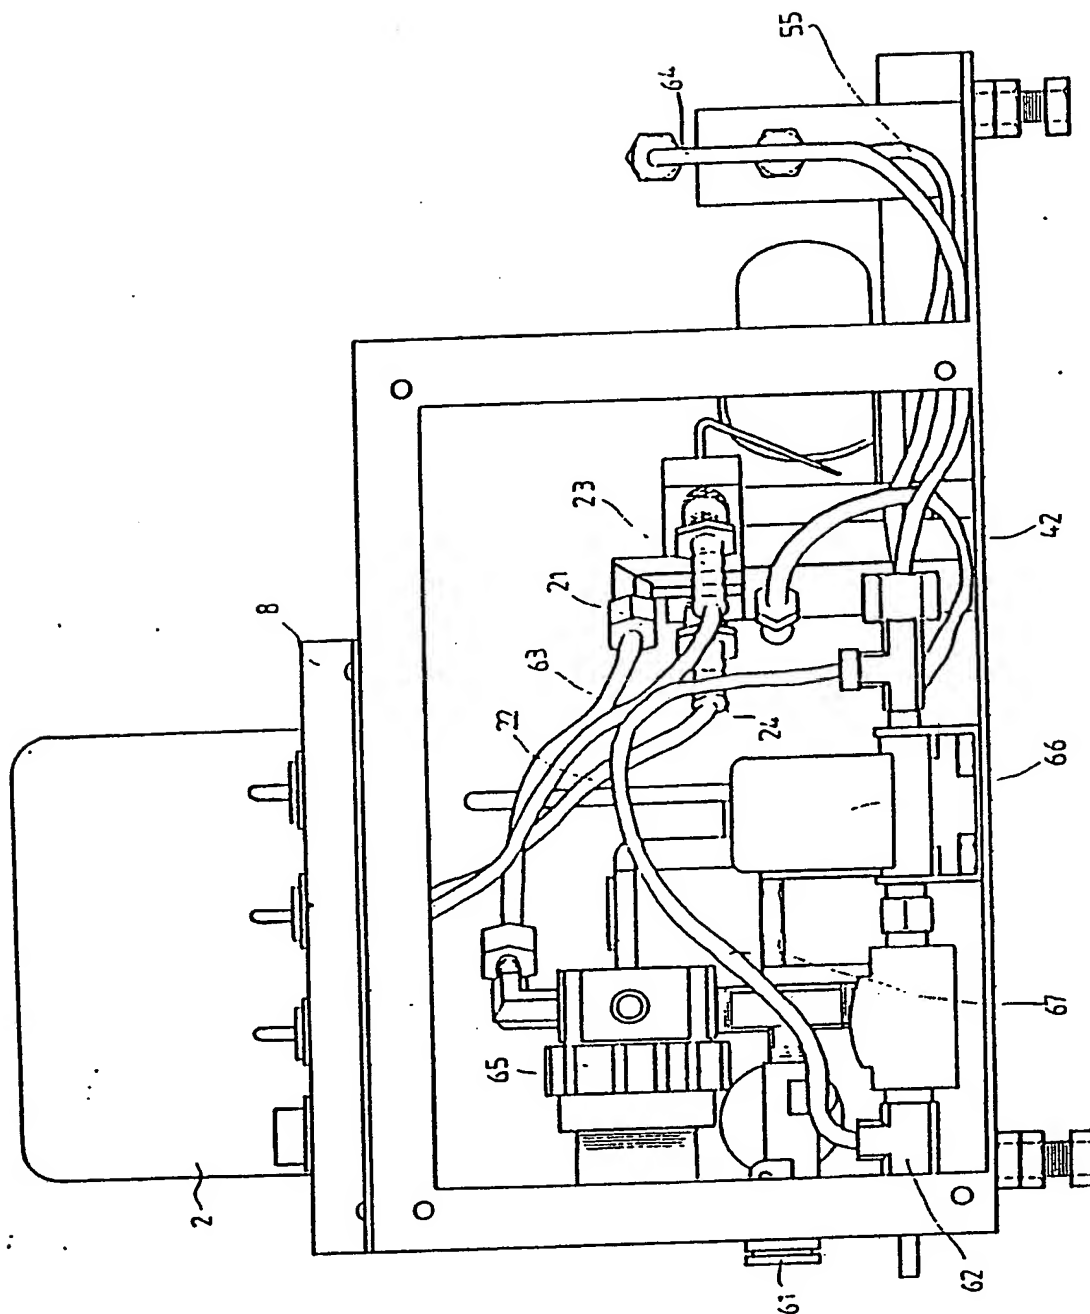


FIG 3

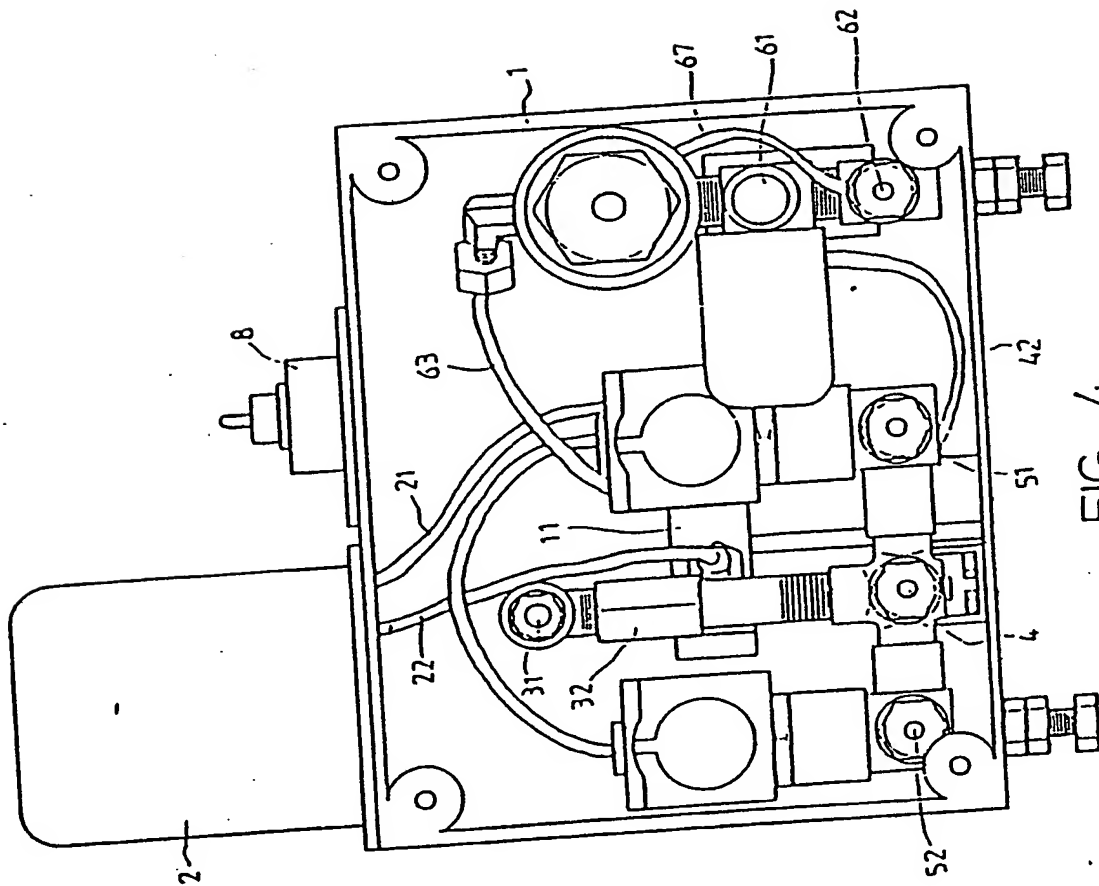


FIG. 4

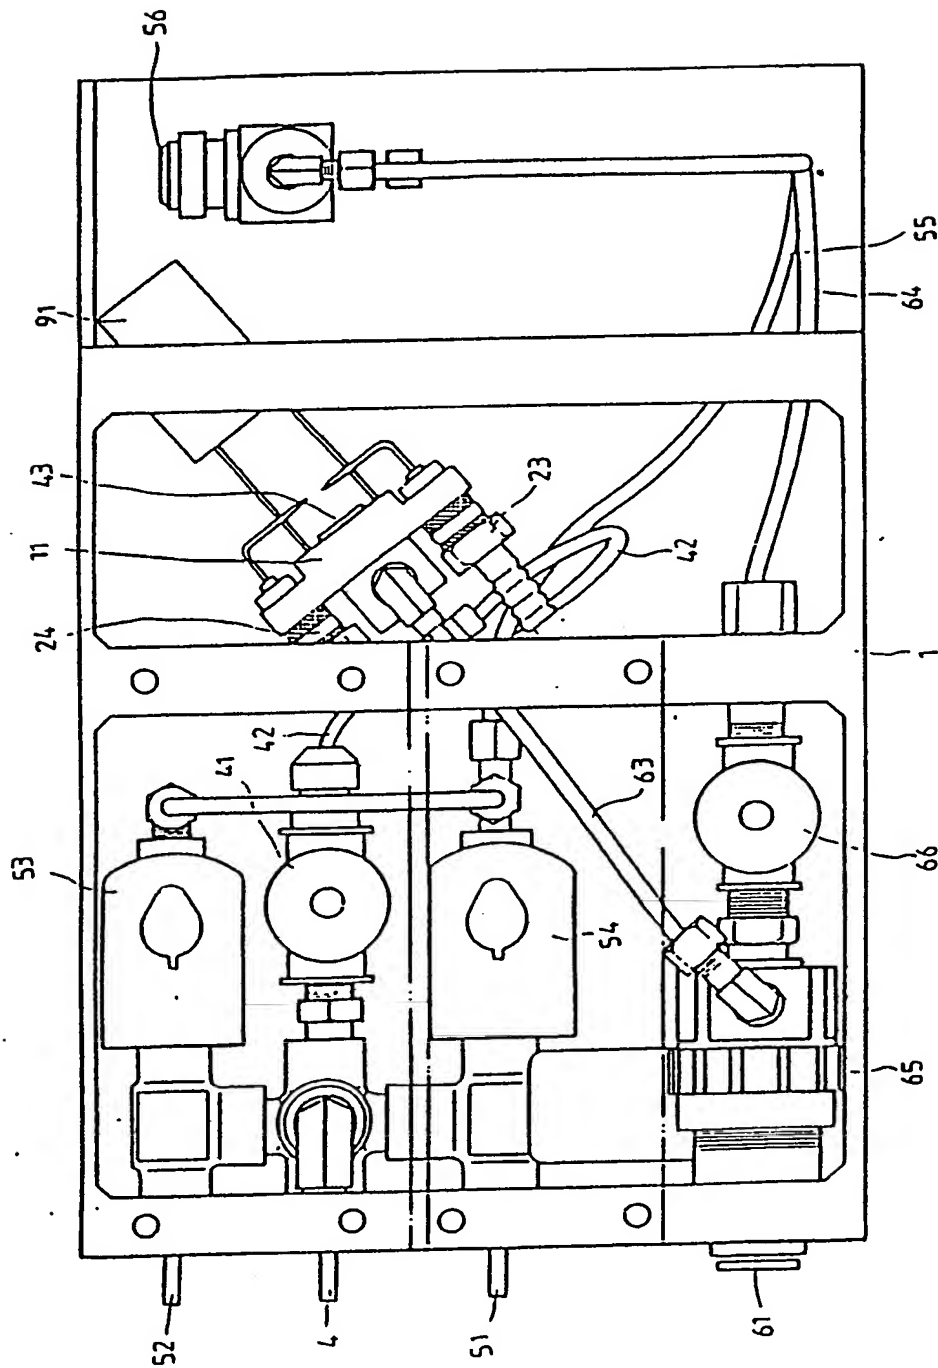


FIG. 5



6/6

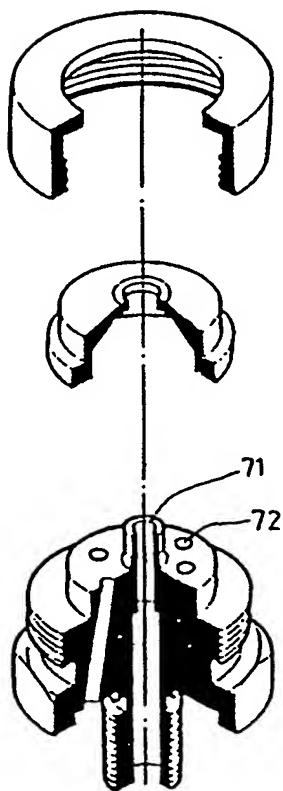


FIG . 6

## TITLE: PREHEATING-EXEMPT FUEL GASIFYING STOVE

This invention relates to a preheating-exempt fuel gasifying stove, or burner.

5 It is found that most fuels for gasifying stoves are kerosene and Diesel fuel oil which are of high igniting point. Hence, in order to cause the fuel to be burned easily, it is commonly suggested to set a preheating procedure so that the fuel will be heated prior to its gasification thereby helping the combustion  
10 of the fuel. However, the temperature increased in such preheating procedure is often insufficient to cause a complete combustion, thus wasting fuel, lowering the efficiency as well as polluting the <sup>environment</sup> ~~circumstances~~. Furthermore, the gasifying stove is usually connected  
15 externally with a tank of gas for igniting the gasifying fuel. Whereas, the gas tank will occupy a lot of space, causing much inconvenience in installation.

It is, therefore, an object of the present invention to provide a preheating-exempt fuel gasifying  
20 stove which may obviate and mitigate the above-mentioned drawbacks.

It is the primary object of the present invention to provide a preheating-exempt fuel gasifying stove which utilizes a high voltage coil to connect with an electrode rod to produce sparks so as to ignite an auxiliary flame which will in turn ignite a main flame.

It is another object of the present invention to provide a preheating-exempt fuel gasifying stove wherein the fuel is entrained with highly compressed air to pass through a micro-injector to gasify momentarily so that the gasified fuel can be ignited directly without preheating.

It is still another object of the present invention to provide a preheating-exempt fuel gasifying stove in which the fuel can be transmitted even without applying pressure thereto but if a high pressure is applied thereto, a faster gasifying effect and a higher efficiency will be obtained.

It is still another object of the present invention to provide a preheating-exempt fuel gasifying stove which makes use of a guiding cylinder to lead the first flame produced in the intersection of the auxiliary flame

and the main flame to form the second combustion hence providing a complete combustion and a higher temperature for combustion.

It is a further object of the present invention to provide a preheating-exempt fuel gasifying stove which is economic to produce.

Other objects and advantages of the invention will be apparent from the following description and the accompanying drawings in which similar characters of reference indicate similar parts throughout the several views.

FIG. 1 is a perspective view of a preheating-exempt fuel gasifying stove according to the present inventions;

FIG. 2 is a perspective view of the present invention from another view;

FIG. 3 is front view of FIG. 1;

FIG. 4 is a left side elevational view of FIG. 1;

FIG. 5 is a top plan view of FIG. 1; and

FIG. 6 is an exploded view of the micro injector.

With reference to the drawings and in particular to FIG. 1 thereof, the preheating-exempt fuel gasifying stove

according to the present invention mainly comprises  
a frame 1 on the top of which there is a high voltage  
coil 2 connected with the ends of two wires 21 and 22.  
The other ends of the wires 21 and 22 are connected  
5 to electrode rods 23 and 24 which are mounted on a  
stand 11 vertically disposed on the frame 1. From  
the front ends of the electrode rods 23 and 24 extend  
a pair of symmetric igniting members having an intersection  
just in front of an auxiliary injector 43.

10 Fuel is fed through an opening 31 below which there  
is a filter 32 which is in turn connected at the lower end  
with three throttling valves 4, 51 and 52 which are in  
communication with one another. The auxiliary throttling  
valve 4 is connected at the right side with respect to  
15 FIG. 1 with an electro-magnetic valve 41 which is in turn  
joined to the auxiliary injector 43 via a pipe 42. Two  
primary throttling valves 51 and 52 are respectively  
disposed at two sides of the auxiliary throttling valve 4  
wherein the primary throttling valve 51 is used at the  
20 beginning of the main flame while the primary throttling  
valve 52 is for strengthening the main flame. Two

electro-magnetic valves 53 and 54 are respectively connected to the throttling valves 52 and 51 so as to control the operation thereof. Similarly, the electro-magnetic valves 53 and 54 are connected to the main flame injector 56 via a pipe 56.

Air is transmitted through an inlet 61 below which there is an air valve 62 so as to control the air flow rate. At the right side of the <sup>m</sup>ain valve 62 there are two pipes 63 and 64. The pipe 63 is connected at the upper end with a voltage stabilizing device 65 which is in turn connected to the auxiliary flame injector 43. The pipe 64 is connected at the right side with an electro-magnetic valve 66 and extends to the main flame injector 56. An exhaust pipe 67 is used to let the low-pressurized air to feed directly into the main flame injector 56 without passing through the electro-magnetic valve 66 (see FIG. 3).

FIG. 6 shows the structure of the injectors 43 and 56 of the present invention. As may be seen, the center hole 71 of the structure is a fuel injecting opening around which are a plurality of small holes

72 for injecting high pressure air. The auxiliary flame pipe 42 and the main flame pipe 5 are respectively led into center holes 71 of corresponding injectors 43 and 56. The air pipes 63 and 64 are also respectively  
5 passed into the small holes 72 of corresponding injectors 43 and 56. Thus, when the fuel is injected out of the center hole 71, it will mix with the high pressure air therearound.

On the frame 1 there is a small guiding cylinder 91 mounted on the outlet of the auxiliary flame injector 43. Besides, a large guiding cylinder 92 is disposed outside the outlet of the main flame injector 56 and the front end of the small guiding cylinder 91 is adjusted to intersect with the central region of the  
10 main flame injector 56 and the large guiding cylinder 92.  
15

Referring back to FIG. 1, the frame 1 is further provided at the top with a seat 8 on which there are an indicating light 81, an igniting switch 82 for controlling the ignition of the electrode rods 23 and  
20 24, an auxiliary flame igniting switch 83 for controlling the electro-magnetic valve 41 on the auxiliary flame pipe

and the voltage stabilizing device 65 of the air pipe,  
and a flame strengthening switch 84 for controlling  
the electro-magnetic valves 53 and 54 of the main flame  
pipe and the electro-magnetic valve 66 and the air pipe  
so as to obtain the strong main flame.

When in use, first turn on the igniting switch 82  
and adjust the air volume valve for the auxiliary flame  
until the electrode rods 23 and 24 produce sparks. Then,  
turn on the auxiliary igniting switch 83 and regulate  
the auxiliary flame fuel valve 4 to inject the fuel from  
the center hole 71 of the auxiliary flame injector 43.  
The fuel will thus mix with the high pressure air to  
gasify momentarily and will be ignited to form an  
auxiliary flame 93. Thereafter, adjust the air volume  
valve to an appropriate position and open the first period  
main flame fuel valve 51 so as to open the electro-magnetic  
valve 53 of the main flame pipe and the electro-magnetic  
valve 66 of the air pipe thereby injecting fuel and air  
out of the main flame injector 56 and gasifying the  
fuel momentarily. Meanwhile, since the auxiliary flame  
is at a continuous igniting condition, the gasified



fuel injected out of the main flame injector 56 will be rapidly ignited to form the first combustion at the intersection. The flame will be led out of the guiding cylinder 92 to form the second combustion.

5 As a result, the efficiency and the temperature for combustion will be increased but the waste gas pollution will be decreased. Further, the operator may selectively open the flame strengthening valve 84 and in the meantime, the electro-magnetic valves 53 and 54 will be opened to  
10 offer a large amount of fuel which will be adapted to a provision of appropriate air supply so as to provide a strong flame.

The present invention is applicable to ~~kerosene~~<sup>gas</sup> kerosene, Diesel fuel oil and heavy fuel oil. The combustion  
15 temperature may reach 1370 C in an open stove test and 1700 C in a closed stove test while the carbon monoxide concentration is merely 64--100ppm. It is estimated that the evolved heat for kerosene is around 10390 Kcal/kg which is much better than the commonly used stove.

20 ~~The various features of novelty which characterize the invention are pointed out with particularity in the~~

### CLAIMS

1. A liquid-fuel burner comprising a main fuel injector having means to mix air with injected fuel to produce a main burner flame, and including an auxiliary fuel injector having means to mix air under pressure with injected fuel to produce an auxiliary flame, sparking means for igniting the fuel/air mixture from the auxiliary injector to produce said auxiliary flame, said auxiliary injector being located so that the air/fuel mixture from the main injector is ignited by said auxiliary flame.

2. A preheating-exempt fuel gasifying stove comprising a high voltage coil on a frame and connected with two electrodes via two wires, said electrode being rigidly mounted on a fixed seat vertically disposed on the frame and having at the front end an igniting rod, said igniting rods being at symmetric positions and intersecting just in front of an auxiliary flame injector; a fuel inlet below which there is a filter which is in turn connected at the lower end with a three-way oil valve, said three-way oil valve being connected with an electro-magnetic valve at each way thereof, one way of the oil valve being connected to an auxiliary flame injector while the other two way thereof being directed to a main flame injector; an air inlet having at the lower part an air volume valve and extending to form two pipes one of which is connected at the upper end to a voltage stabilizing device and then led to the auxiliary flame injector while the other one is connected to an electro-magnetic valve and extends to the main flame injector, an exhaust pipe being provided

to enable low pressurized air to feed to the main  
auxiliary flame injector without passing through the  
electro-magnetic valve; a small guiding cylinder and  
a large guiding cylinder respectively located outside  
5 the auxiliary flame injector and the main flame injector  
and the small guiding cylinder being adjusted to cause  
the front end thereof intersecting the central region of  
the main flame injector and the large guiding cylinder;  
and a switch seat having thereon an indicating light,  
10 an igniting switch for controlling ignition of the  
electrodes, an auxiliary flame igniting switch for  
controlling the electro-magnetic valve on the auxiliary  
flame pipe and a flame strengthening switch for controlling  
the electro-magnetic valves on the main flame pipe and  
15 main flame air pipe.

3. A preheating-exempt fuel gasifying injector  
as claimed in claim 2, wherein the center holes of the  
main flame injector are used for injecting fuel while  
the small holes therearound for injecting air so that  
20 when the fuel is injected out of the center holes, the  
fuel will be mixed with the air entrained therewith so  
as to be able to gasify momentarily.